






GARRISON BIKE RACK

COMPATIBILITY

Suitable for all Asgard Garrison units.

TOOLS REQUIRED




8mm spanner and power driver POSI-DRIV screwdriver.

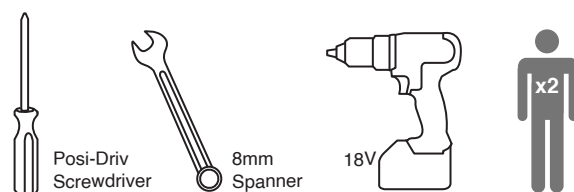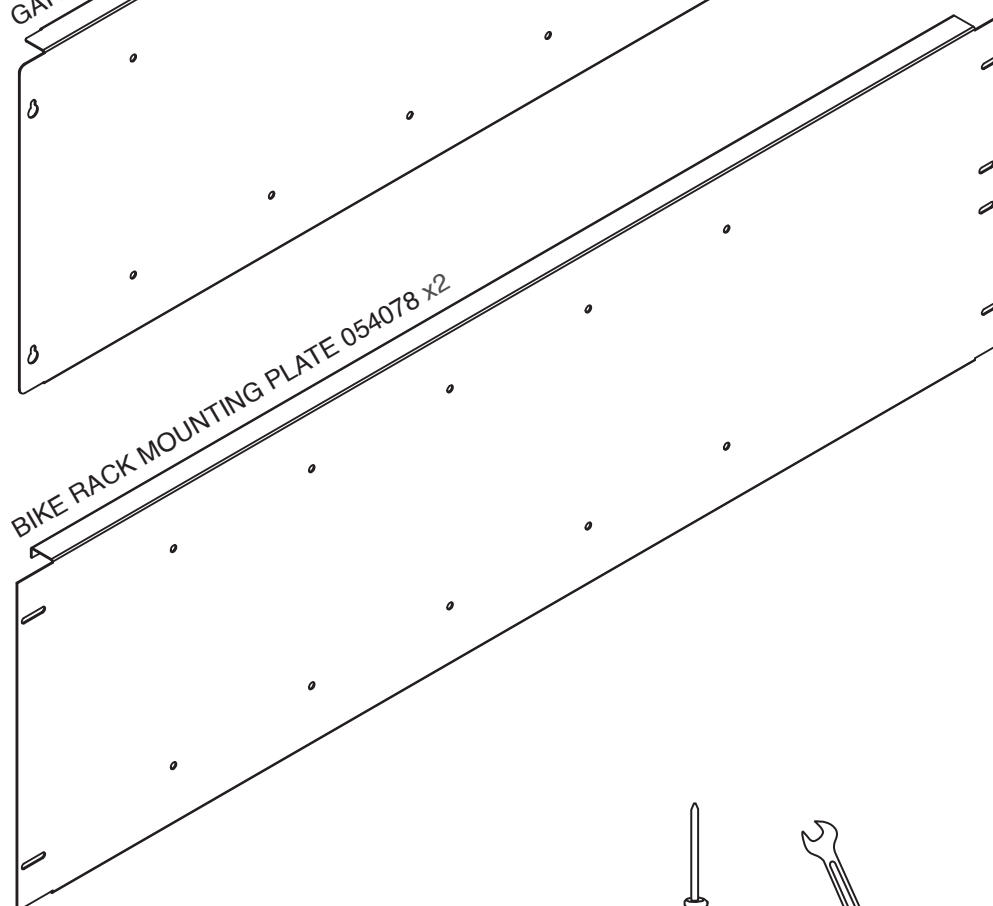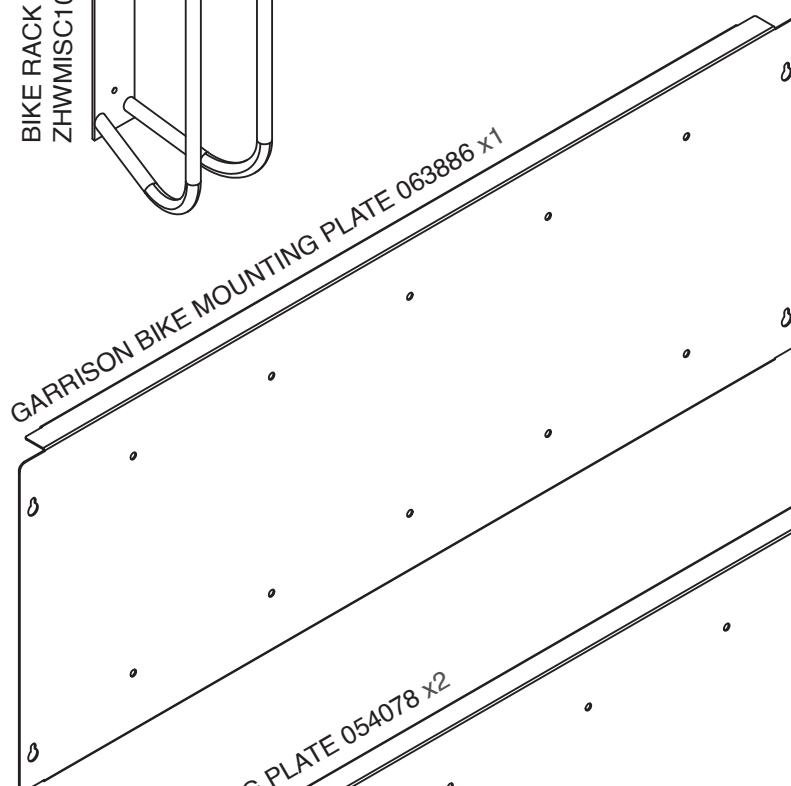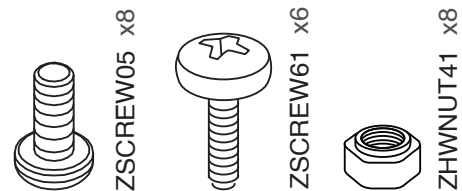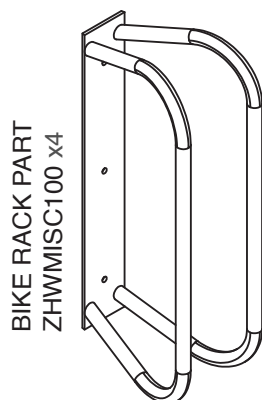


For maintenance instructions of this product visit www.asgardsss.co.uk

ASGGARRBIKERACK###


1! ATTACH BIKE RACKS IN DESIRED POSITION ACROSS THE THREE BIKE RACK MOUNTING PLATES USING EIGHT ZSCREW05 AND EIGHT ZHWNUT41.

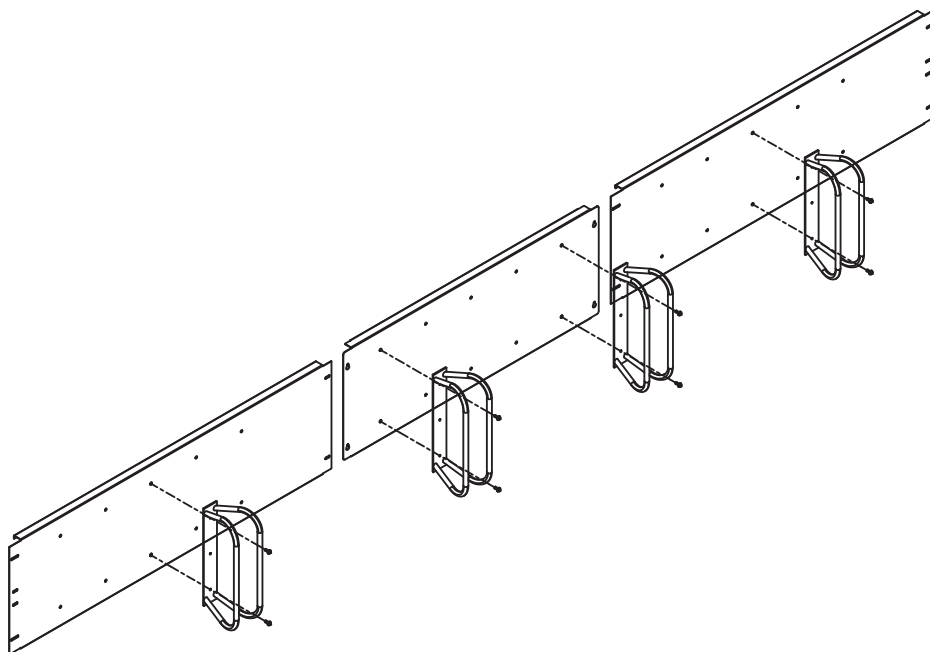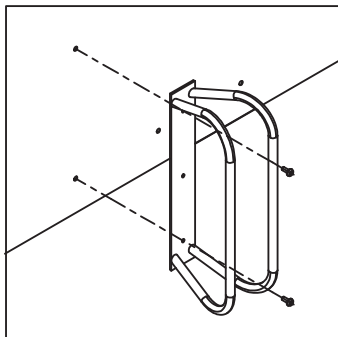

2! REMOVE EXISTING SCREWS FROM THE REAR SIDE OF THE GARRISON. THESE WILL BE USED TO ATTACH THE BIKE RACK MOUNTING PLATES.

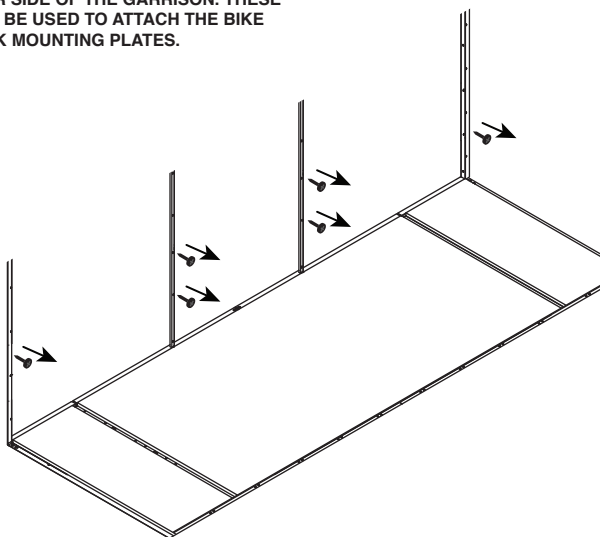

3! PARTLY SCREW THE BIKE RACK MOUNTS (063886) TO THE SHED USING THE 6 REMOVED ZSCREW61. THE TWO SIDE SCREWS CAN BE TIGHTENED.

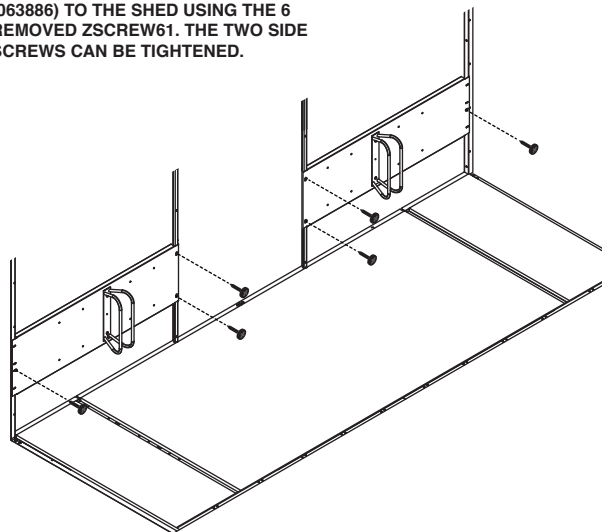

4! POSITION THE GARRISON BIKE MOUNT PLATE (063886) OVER THE REMAINING LOOSE SCREWS AND FULLY TIGHTEN.

