ANNEXE

BASE INSTRUCTIONS

Flat and firm base. Recommended: concrete, tarmac or paving flags.
Min. distance from walls/ shrubbery: 1000mm.
Min. base size (WxDxH) 1990mm x 1100mm x 50mm.

LEVELING THE UNIT


Correctly level the constructed unit using the shims (ZCOMPPLAS) provided prior to fixing the unit to the ground. Slide the packing pieces under the corners of the unit base as required until an equal gap has been achieved around the door allowing for its smooth operation and alignment.


It is always recommended to anchor the unit to the ground. Drill through the four holes in the base of the unit using 6mm dia masonry drill to a depth of 70mm. Screw in the anchor fixings. (These have a self cutting thread). If not anchoring the unit, fit the self seal plugs BEFORE BUILDING to block the fixing holes from underneath. **Please note product must be anchored down to comply with LPS1175.**

TOOLS REQUIRED


Power driver POSI-DRIV screwdriver, 6mm dia. masonry drill and a 10mm socket or spanner.

Warning: some panels may weigh over 20Kg. Beware of manual handling

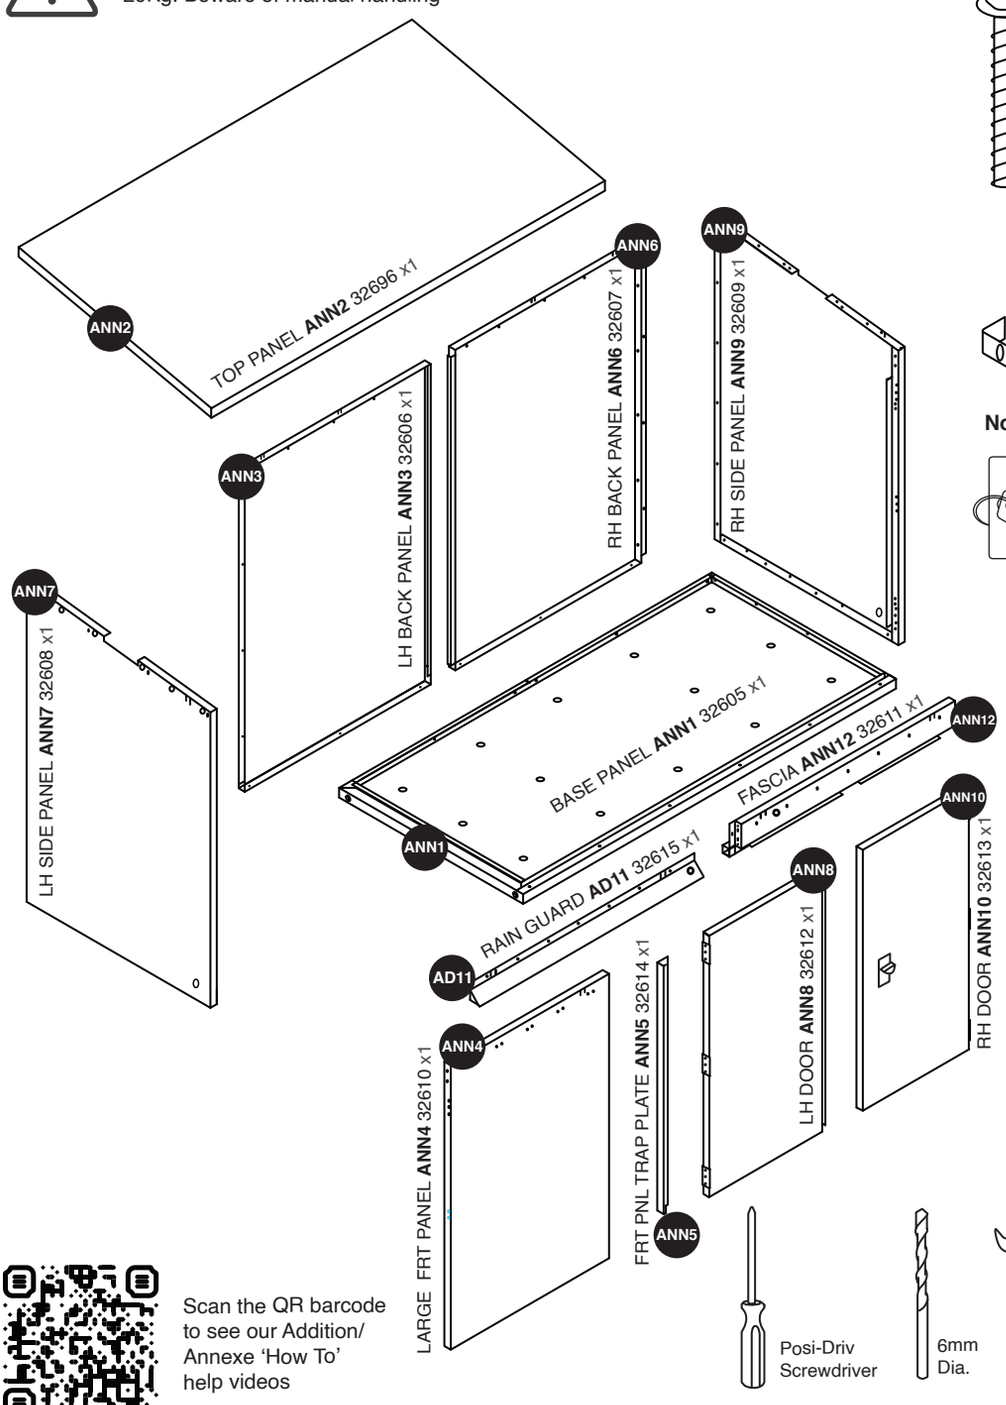

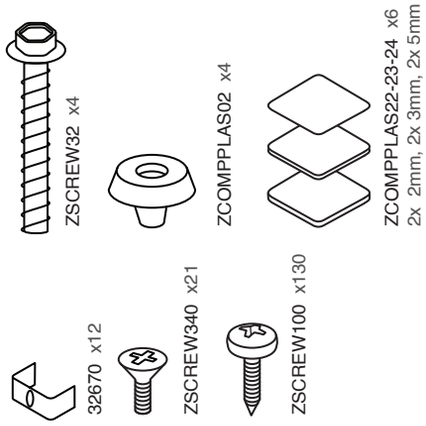


Note: Spare screws are included



Warning: Please keep this key card safe! Refer to if replacement key is required.


Scan the QR barcode to see our Addition/ Annexe 'How To' help videos

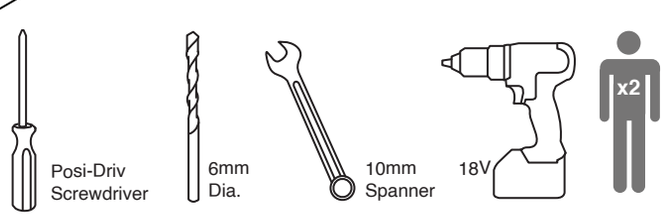

For maintenance instructions of this product visit www.asgardsss.co.uk


PLEASE NOTE ALL SCREWS ARE FIXED FROM THE INSIDE

1

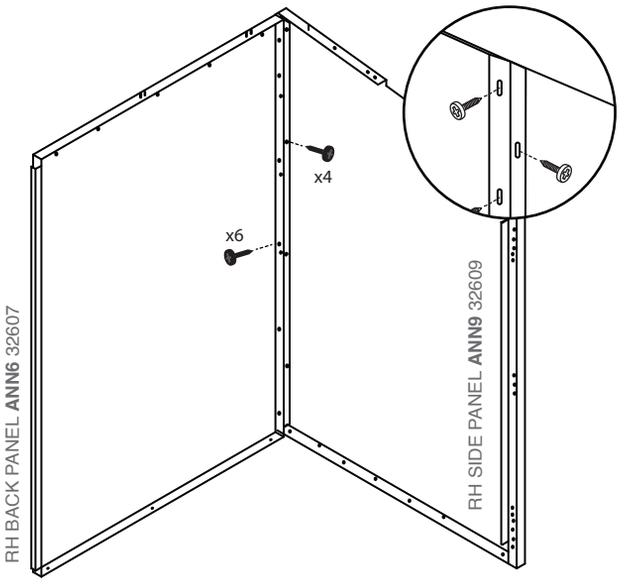


x10

2! IF YOU HAVE AN OPTIONAL RAMP, PLACE UNDERNEATH FRONT BASE PANEL AT THIS STAGE

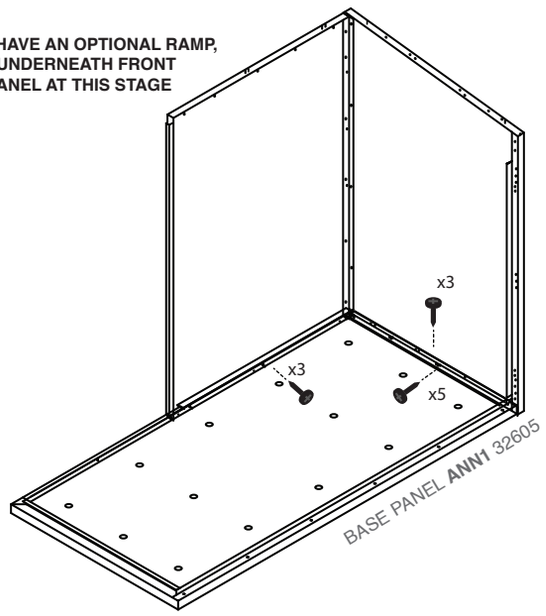


x11

3

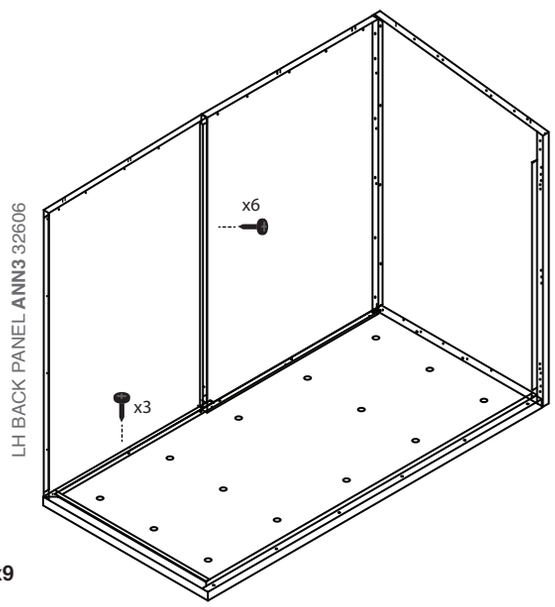


x9

4

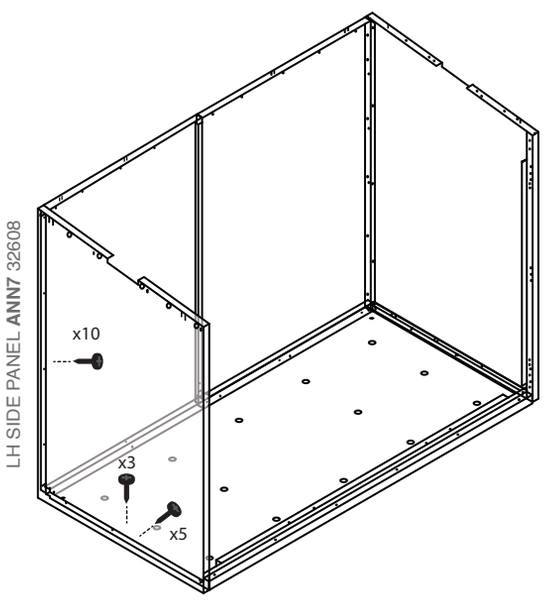


x18

5! ATTACH PANEL 32610 TO LEFT OR RIGHT HAND SIDE TO DETERMINE DOOR LOCATION

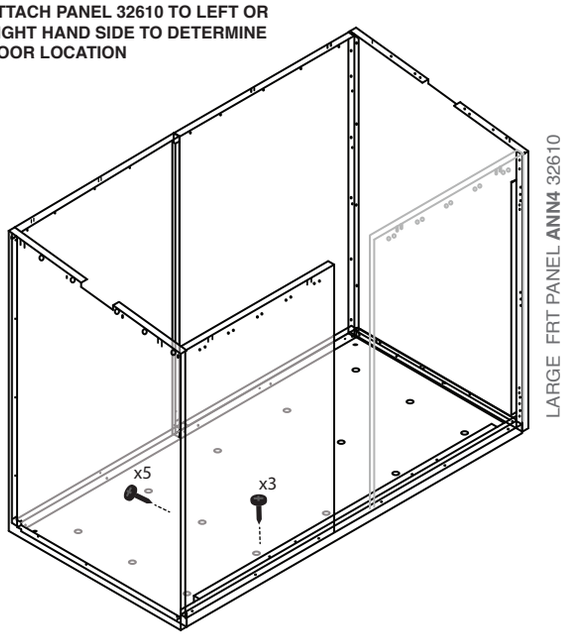


x8

6

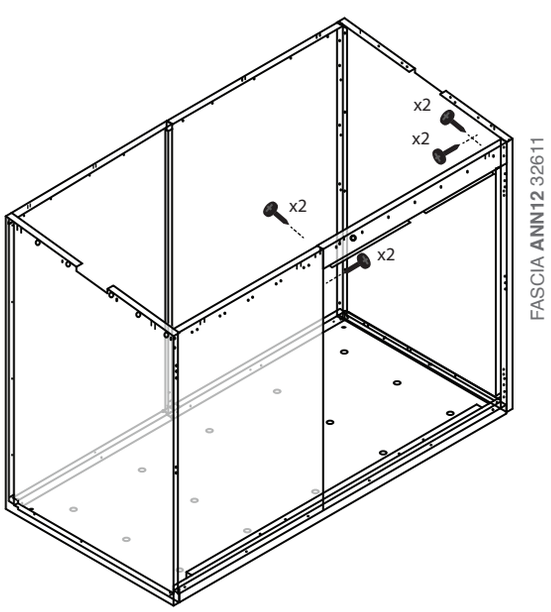


x8

7

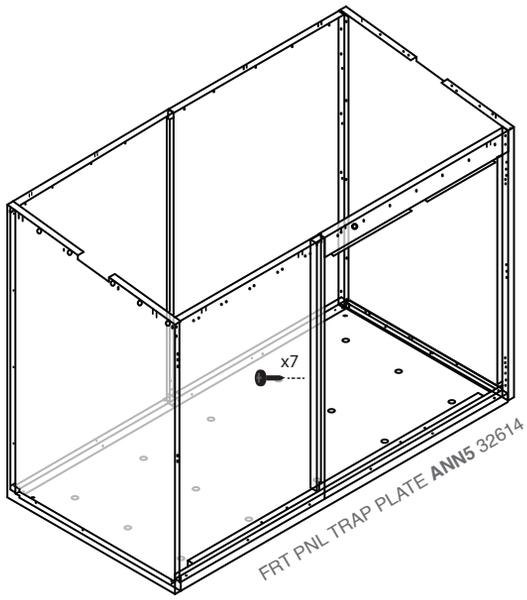


x7

8

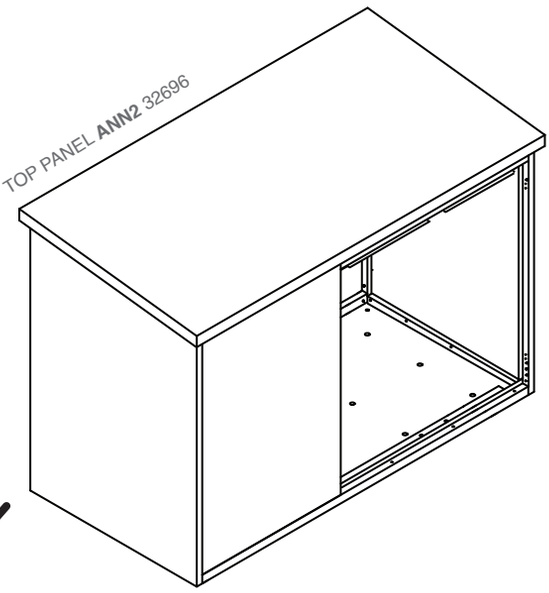


9!

9A. TRAP RAIN GUARD BETWEEN FASICA & LID. 9B. SCREW IN

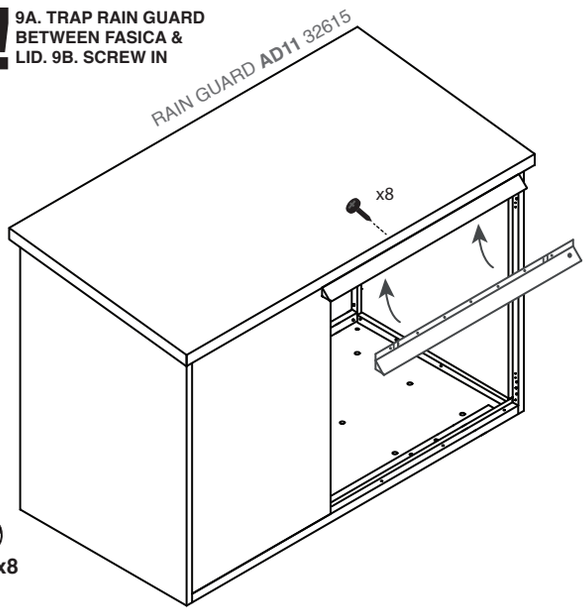


x8

10

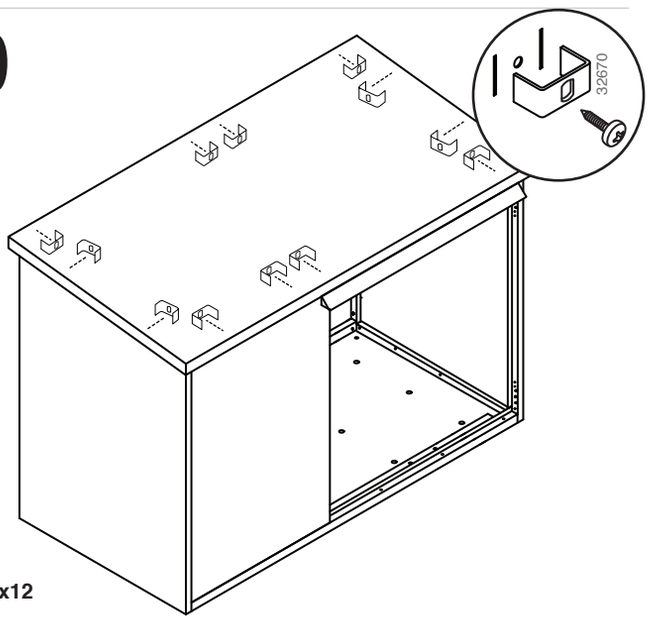


x12

11

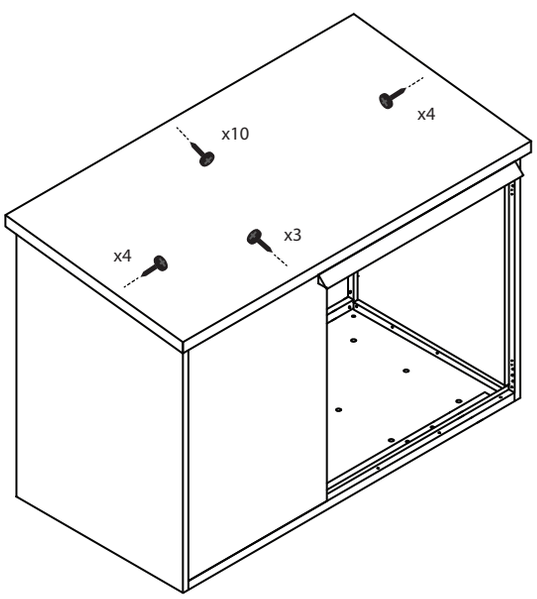


x21

12

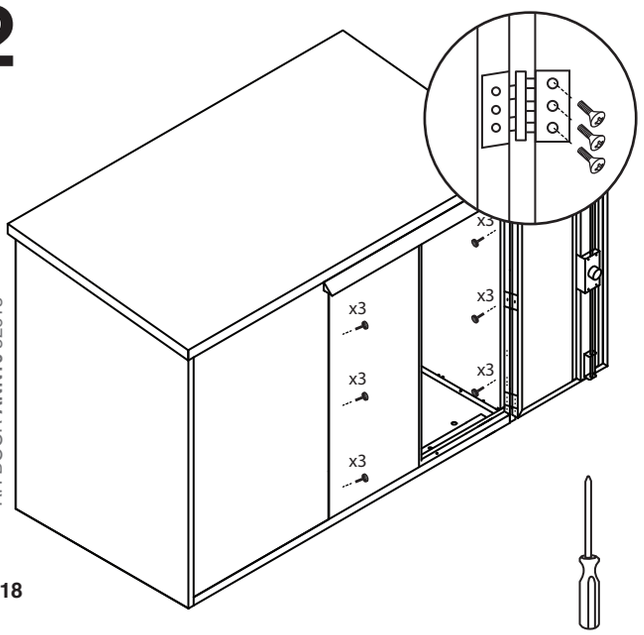

x18

13! LEVEL SHED UNTIL DOORS ALIGN USING ZCOMPPLAS AS SUITABLE

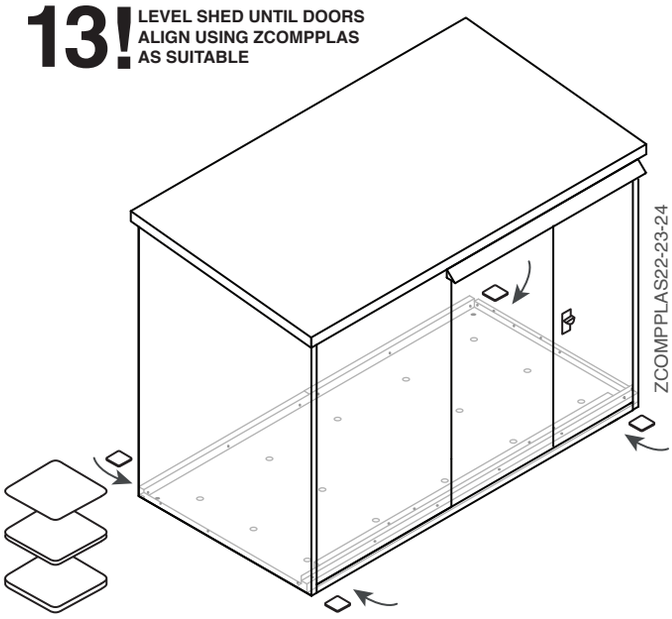

14

